


Compressed air tubing, Series TU1-S-PAM

R412009927

General series information Series TU1

- AVENTICS Series TU1 offers a broad range of plastic materials and colours to fit with your tubing application and easily identify your pneumatic circuit. TU1 Tubing are suitable for dynamic laying and offers a wide range of working environments including versions for the food industry.

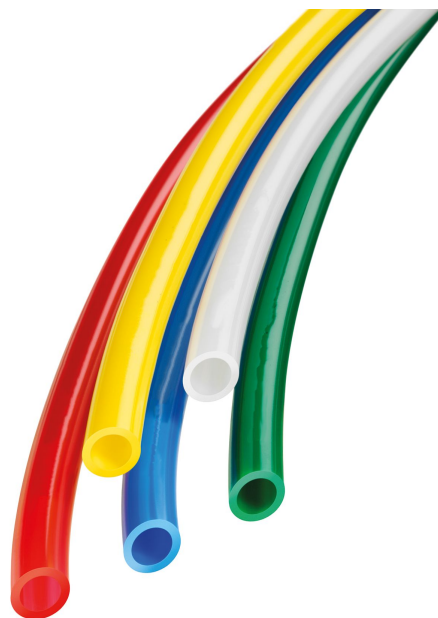

Technical data

Industry
Industrial

External Ø
14 mm

Wall thickness
1.25 mm

Bending radius min. at 20°C
90 mm

Color
Blue

Min. ambient temperature
-40 °C

Max. ambient temperature
80 °C

Max. working pressure at [[20]°C]
11 bar

Delivery unit length
25 m

Weight per meter
0.052 kg

Material
Polyamide

Part No.
R412009927

Technical information

External calibrated

Halogen-free

Excellent hydrolysis characteristics

Suitable for dynamic laying

Excellent UV resistance

Resistant to microbes