



MCMK 1kV

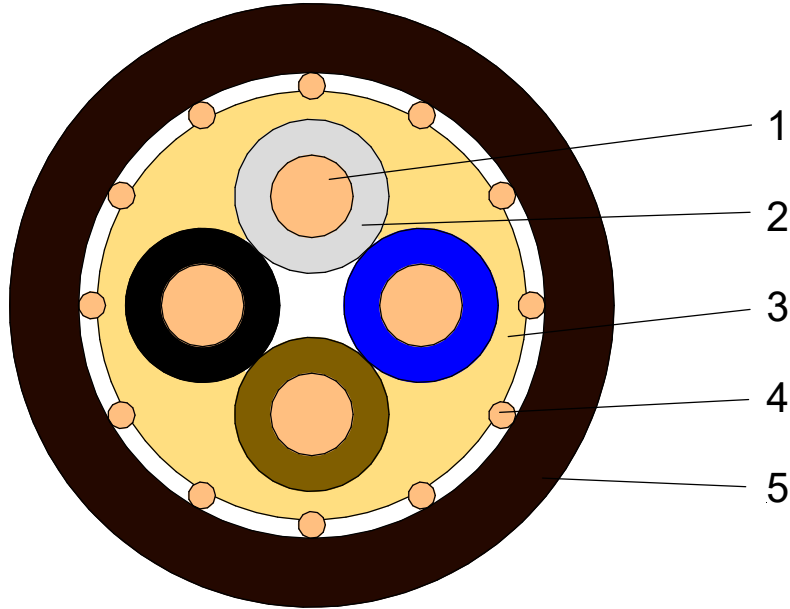

Pos.	type	unit	2x1,5 / 1,5	4x1,5 / 1,5	2x2,5 / 2,5	4x2,5 / 2,5
0	standard	-	HD603 3F / SFS 4880			
1	conductor	-	copper, round, solid			
2	insulation	-	PVC			
	insulation thickness, min.	mm	0,62			
	insulation thickness, med.	mm	0,8			
3	filler	-	EPDM			
4	concentric conductor	mm ²	1,5		2,5	
5	sheath	mm	PVC			
	colour	-	black			
	sheath thickness, min.	mm	1,43			
-	outer diameter Ø	mm	11,8	13,0	12,6	14
-	cable weight	g/m	205	258	250	320
-	core identification	-	bl / br	bl / br / sw / gr	bl / br	bl / br / sw / gr
-	marking	-	Waskönig+Walter MCMK ...x.... RE/.... 0,6/1kV Fca Jahr (4stellig) Quartal Meter			

MCMK 1kV

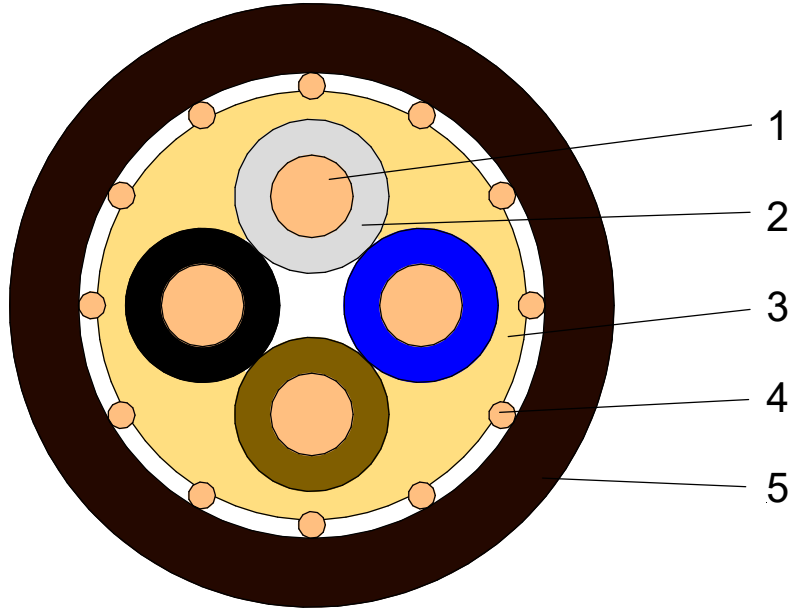

Pos.	type	unit	4x6 / 6	4x10 / 10	4x16 / 16
0	standard	-	HD603 3F / SFS 4880		
1	conductor	-	copper, round, solid	copper, round, stranded	
2	insulation	-	PVC		
	insulation thickness, min.	mm	0,8		
	insulation thickness, med.	mm	1		
3	filler	-	EPDM		
4	concentric conductor	mm ²	6	10	16
5	sheath	mm	PVC		
	colour	-	black		
	sheath thickness, min.	mm	1,43		
-	outer diameter Ø	mm	17,4	20	22,8
-	cable weight	g/m	576	841	1185
-	core identification	-	bl / br / sw / gr		
-	marking	-	Waskönig+Walter MCMK ...x.... RE/.... 0,6/1kV Fca Jahr (4stellig) Quartal Meter		