


DIN 7982
A2
Alternative Norm
ersetzt durch ISO 7050

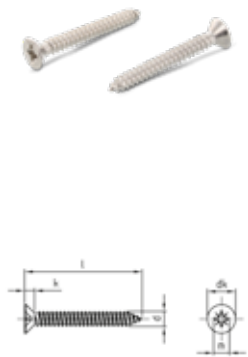

TX Form siehe ISO 14586
- Blechgewinde
- PZ
- Senkkopf

TX type see ISO 14586
- Sheet thread
- PZ
- Countersunk head

DIN 7982 A2 PZ
Senk-Blechschraben mit Kreuzschlitz
DIN 7982 A2 PZ
Cross recessed countersunk head tapping screws

d	4,2	4,8	5,5	6,3
l/mm	Art. Nr. / Item no.	Art. Nr. / Item no.	Art. Nr. / Item no.	Art. Nr. / Item no.
4,5				
6,5				
9,5	79822042 95	79822048 95		
13	79822042 13	79822048 13	79822055 13	79822063 13
16	79822042 16	79822048 16	79822055 16	79822063 16
19	79822042 19	79822048 19	79822055 19	79822063 19
22	79822042 22	79822048 22	79822055 22	79822063 22
25	79822042 25	79822048 25	79822055 25	79822063 25
28				
32	79822042 32	79822048 32	79822055 32	79822063 32
35		79822048 35		
38	79822042 38	79822048 38	79822055 38	79822063 38
42			79822055 42	
45	79822042 45	79822048 45	79822055 45	79822063 45
50	79822042 50	79822048 50	79822055 50	79822063 50
55		79822048 55	79822055 55	
60	79822042 60	79822048 60	79822055 60	79822063 60
70	79822042 70	79822048 70	79822055 70	79822063 70
80	79822042 80	79822048 80	79822055 80	79822063 80
90		79822048 90	79822055 90	79822063 90
100	79822042 100	79822048 100	79822055 100	79822063 100
110		79822048 110		
120		79822048 120	79822055 120	79822063 120

	1000 ≥ 32 500 ≥ 50 200	1000 ≥ 25 500 ≥ 45 200	1000 ≥ 25 500 ≥ 45 200	500 ≥ 25 200
dk	8,1	9,5	10,8	12,4
k	2,5	3	3,4	3,8
m	4,4	5	6,3	7
Antrieb	PZ2	PZ2	PZ3	PZ3

DIN